







ORDERING FORM

FIXTURE: PLC BRADY FLAT PANEL COLOR CHANGING

EXAMPLE: PLC-40W-5200L-24-4K-FLK24

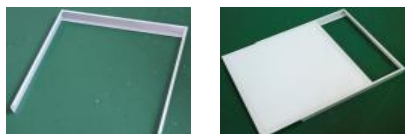CODE	SIZE	WATTS & LUMENS	KELVIN	ACCESSORIES				
PLC	<u>STANDARD 110</u>	<u>STANDARD 110</u>	3K- 3000K 35K- 3500K 4K- 4000K 5K- 5000K	KITS	REMOTES			
	14 - 1 x 4	40W-4400L 45W-4950L				<u>SURFACE KITS</u> SK14-1x4 KIT SK22-2x2 KIT SK24-2x4 KIT	WWW -Wall Mount Wired 120-277V WMB -Wall Mount Battery Wireless 2.4G RHH -Remote Handheld	
	22 - 2 x 2	36W-3960L 40W-4400L 45W-4950L				<u>FLANGE KITS</u> FLK14-1x4 KIT FLK22-2x2 KIT FLK24-2x4 KIT		
	24 - 2 x 4	50W-5500L 60W-6600L				<u>HANGING KITS</u> HK14-1x4 KIT (3 pcs per kit) HK22-2x2 KIT (2 pcs per kit) HK24-2x4 KIT (3 pcs per kit)		
	<u>PREMIUM 130</u>	<u>PREMIUM 130</u>						
	14 - 1 x 4	40W-5200L						
	22 - 2 x 2	35W-4550L 40W-5200L						
	24 - 2 x 4	40W-5200L 50W-6500L						
	<u>PREMIUM 119</u>	<u>PREMIUM 119</u>						
	24 - 2 x 4	60W-7140L						

ACCESSORIES

					
SK-Surface Kits	FK-Flange Kits	HK-Hanging Kits	WWW	WMB	RHH

Parker Color Temperature Adjusted LED Panel Brady Series

FEATURES

Driver: PF≥0.95, THD<15%, Non-Flicker, Dimmable

Controller: 2.4G RF, 3000-6000 CCT Adjustable,
Unlimited Lights Can Be Controlled by a Remote

Lumens: 130 lm/W

LED Chips: Epistar, CRI>80, LM80 **LED Source:** 2835

Beam Angle: 120°

Color Temperature: 3000K, 3500K, 4000K, 5000K

Material: White Aluminum and High Quality LGP

Included: Earthquake-Proof Hook


Certification: UL, FCC, CE, RoHS

Warranty: 5 Years





ITEM NUMBER	WATT (W)	LUMEN lm/W	LUMENS	DIMENSIONS
PLC-36W-22-TG-01	36W	STANDARD 110 LM/W	3960	2' x 2'
PLC-40W-14-TG-07	40W		4400	1' x 4'
PLC-40W-22-TG-07	40W		4400	2' x 2'
PLC-45W-14-TG-07	45W		4950	1' x 4'
PLC-45W-22-TG-01	45W		4950	2' x 2'
PLC-50W-24-TG-05	50W		5500	2' x 4'
PLC-60W-24-TG-05	60W		6600	2' x 4'
PLC-35W-22-TG-01	35W		PREMIUM 130 LM/W	4550
PLC-40W-14-TG-07	40W	5200		1' x 4'
PLC-40W-22-TG-07	40W	5200		2' x 2'
PLC-40W-24-TG-07	40W	5200		2' x 4'
PLC-50W-24-TG-01	50W	6500		2' x 4'
PLC-60W-24-TG-01	60W	119 LM/W		7140

ACCESSORIES



SK-Surface Kits



FK-Flange Kits



HK-Hanging Kits



WWW



WMB



RHH