



PARKER LTG.



USA Company

ORDERING FORM

FIXTURE: PL BRADY FLAT PANEL

EXAMPLE: PL-40W-5200L-24-4K-SK24

(Use for Standard or Premium Panels)

PLE-40W-4400L-22-4K-HK22

(Use for Emergency Standard or Emergency Premium)

CODE	WATTS & LUMENS	SIZE	KELVIN	ACCESSORIES		
PL Standard or Premium	<u>STANDARD 110</u> 36W-3960L 40W-4400L 45W-4950L 50W-5500L 60W-6600L	<u>STANDARD 110</u> 14-1 x 4 (40W,45W) 22-2 x 2 (36W,40W,45W) 24-2 x 4 (50W,60W)	3K- 3000K 35K- 3500K 4K- 4000K 5K- 5000K	<u>SURFACE KITS</u> SK14-1x4 KIT SK22-2x2 KIT SK24-2x4 KIT	<u>FLANGE KITS</u> FLK14-1x4 KIT FLK22-2x2 KIT FLK24-2x4 KIT	<u>HANGING KITS</u> HK14-1x4 KIT (3 pcs per kit) HK22-2x2 KIT (2 pcs per kit) HK24-2x4 KIT (3 pcs per kit)
PLE Emergency	<u>PREMIUM 130</u> 25W-3250L 32W-4160L 35W-4550L 40W-5200L 50W-6500L 60W-7800L	<u>PREMIUM 130</u> 14-1 x 4 (25W,40W) 22-2 x 2 (25W, 35W,40W) 24-2 x 4 (32W, 40W, 50W, 60W)				

ACCESSORIES



SK-Surface Kits



FK-Flange Kits



HK-Hanging Kits



PARKER LTG.




USA Company



Parker Standard, Premium & Emergency LED Panel Brady Series

FEATURES

Emergency Battery: Integrated Driver Box with Built-In Lithium Battery, < 24 Hours Charging Time
Driver: PF≥0.95, THD<15%, Non-Flicker
Dimming: 0 - 10V **Beam Angle:** 120°
Lumens: 110 and 130 lm/W
LED Chips: Epistar, CRI>80, LM80
Color Temperature: 3000K, 3500K, 4000K, 5000K
Material: White Aluminum and High Quality LGP
Included: Earthquake-Proof Hook
Certification: UL, FCC, CE, RoHS
Warranty: 5 Years **DLC Availability:** Standard

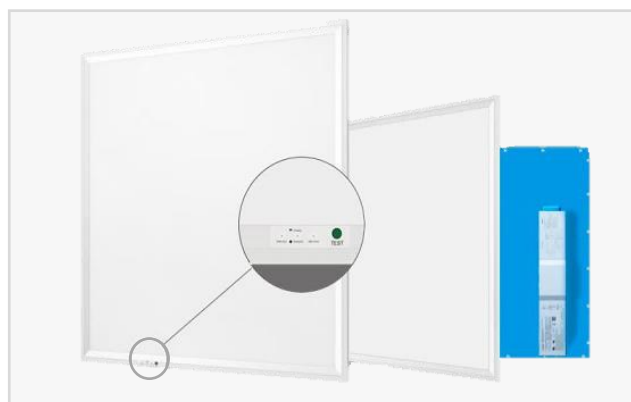

ITEM NUMBER		WATT (W)	LUMEN lm/W	LUMENS	DIMENSIONS
Standard or Premium	Emergency				
PL-36W-22-TG-02	PLE-36W-22-TG-02	36W	STANDARD 110 LM/W EMERGENCY RUN TIME ≥ 120 MINS	3960	2' x 2'
PL-40W-14-TG-02	PLE-40W-14-TG-02	40W		4400	1' x 4'
PL-40W-22-TG-02	PLE-40W-22-TG-02	40W		4400	2' x 2'
PL-45W-14-TG-01	PLE-45W-14-TG-01	45W		4950	1' x 4'
PL-45W-22-TG-02	PLE-45W-22-TG-02	45W		4950	2' x 2'
PL-50W-24-TG-05	PLE-50W-24-TG-05	50W		5500	2' x 4'
PL-60W-24-TG-05	PLE-60W-24-TG-05	60W		6600	2' x 4'
PL-25W-14-TG-01	PLE-25W-14-TG-01	25W	PREMIUM 130 LM/W EMERGENCY RUN TIME ≥ 120 MINS	3250	1' x 4'
PL-25W-22-TG-01	PLE-25W-22-TG-01	25W		3250	2' x 2'
PL-32W-24-TG-01	PLE-32W-24-TG-01	32W		4160	2' x 4'
PL-35W-22-TG-01	PLE-35W-22-TG-01	35W		4550	2' x 2'
PL-40W-14-TG-01	PLE-40W-14-TG-01	40W		5200	1' x 4'
PL-40W-22-TG-01	PLE-40W-22-TG-01	40W		5200	2' x 2'
PL-40W-24-TG-01	PLE-40W-24-TG-01	40W		5200	2' x 4'
PL-50W-24-TG-01	PLE-50W-24-TG-01	50W		6500	2' x 4'
PL-60W-24-TG-01	PLE-60W-24-TG-01	60W		7800	2' x 4'